

RB-A


Drive for vibrating screed RB-A

PRODUCT-INFORMATION

Technical Data

RB-A

Engine / Drive	4-stroke-OHV engine 140FA	
Power	kW	0,87 at 6.500 rpm
Displacement	cm ³	37,7 cm ³
Starting	Recoil Starter	
Working width (depending on profile length)	m	2,44 / 3,66 / 4,47
Sound power level L _{WA}	dB(A)	108
Weight (net / gross)	kg	20 / 28
Packaging dimensions	mm	720 x 700 x 300

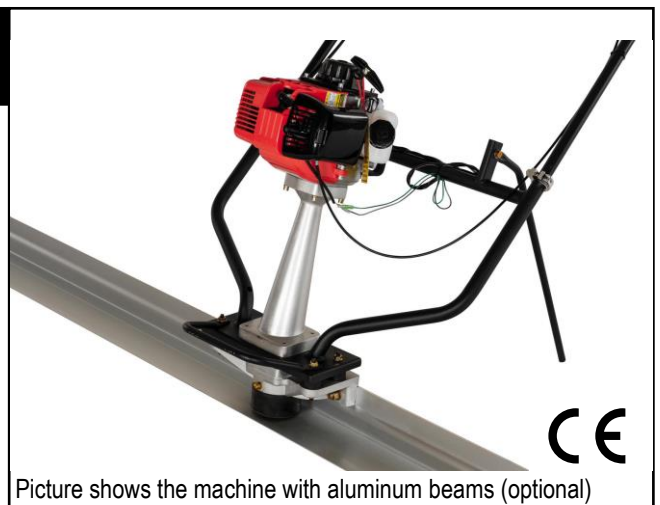

Picture shows the machine with aluminum beams (optional)

Art. No.: RBA

EAN: 40 47424 00540 8

Equipment Features:

Resistant vibratory surface finishing screed and precise leveling of various types of concrete of different consistencies.

The aluminum beams are available in lengths of 2.44 m, 3.66 m and 4.47 m.



Optional aluminum beams are available in different lengths.

Accessoire:

Beam 2.44 m

(Art. Nr. 5PL250, EAN: 40 47424 00541 5)

Beam 3.66 m

(Art. Nr. 5PL350, EAN: 40 47424 00542 2)

Beam 4.47 m

(Art. Nr. 5PL450, EAN: 40 47424 00543 9)